
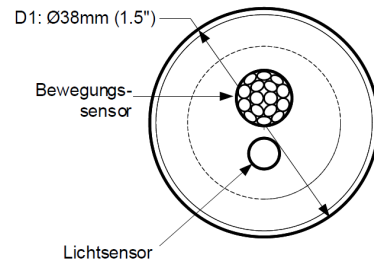



Bewegungs- und Helligkeitssensor für Casambi


Motion and Light Sensor for Casambi

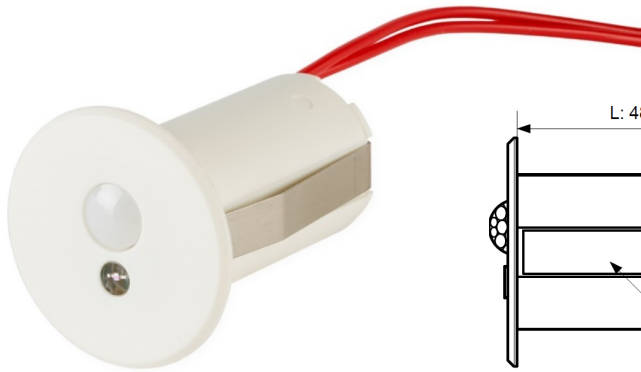

Technische Daten <i>Technical data</i>	weiß <i>white</i>	grau <i>grey</i>	schwarz <i>black</i>
Artikelnummer <i>Part no.</i>	808933	808934	808935
Typ <i>Type</i>	SEMLBT14W	SEMLBT14GR	SEMLBT14B
Versorgungseingang <i>Power supply input</i>	12..24 Vdc/ac		
Funksignal <i>Radio signal</i>	2,4..2,483 GHz; 4 dBm		
Umgebungstemperatur <i>Ambient temperature (ta)</i>	-20..50°C		
Schutzgrad IP <i>IP Protection level</i>	44 Front / 20		
Abmessungen <i>Dimensions</i>	38/25 x 48 mm		

- Sensor für Bewegung und Helligkeit mit Bluetooth-Signal
- Kommuniziert mit Casambi-App auf Smart-Geräten
- Zum Auslösen von Leuchten, Szenen etc. in Casambi-Netzwerken
- Dort konfigurierbar und vielseitig nutzbar
- Sensor max. 5 m, 100 ° horizontal, 64 Zonen
- Einbaugerät, Montage in Bohrung 25..27 mm
- Bei Installation sind die einschlägigen Bestimmungen und die anerkannten Regeln der Technik einzuhalten.

- *Sensor for motion and brightness with Bluetooth signal*
- *Communicates with Casambi App on smart devices*
- *For operation of luminaires, scenes etc. in Casambi networks*
- *To be configured and used in many ways*
- *Sensor max. 5 m, 100 ° horizontal, 64 zones*
- *Device built-in, mounted in drill-hole 25..27 mm*
- *For installation the relevant standards and the recognized technical rules must be respected.*

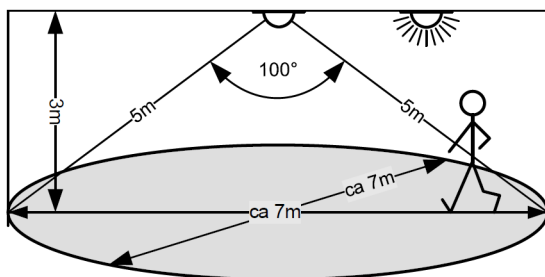

App for
iOS



App for
Android

